



无锡市永捷自动化设备有限公司

Wuxi Yongjie Automation Equipment Co., Ltd

科研创新/品质改变世界

实干兴业/服务成就未来

地址: 无锡市滨湖区胡埭镇工业西区银杏路10#-1
Add: No.10-1 Yinxing Road, Industrial Area West, Hudai
Town, Binhu District, Wuxi City, Jiangsu Province, China
电话(Tel): 0510-85595950 85595962
传真(Fax): 0510-85595969
网址(Http): www.wxyj88.com www.ganbingji.com
www.yongjiezl.com

干冰机

DRY ICE MACHINE



创新 品质 实干 共赢

COMPANY PROFILE 公司简介



无锡市永捷自动化设备有限公司，成立于2007年，坐落于风光旖旎的太湖之滨无锡市滨湖区胡埭镇，交通方便快捷，西邻锡宜高速阳山陆区出口，是一家专注于干冰机和闭式冷却塔、蒸发冷研发、生产和销售的国内知名企业。公司通过ISO9000:2008质量体系认证，管理规范，工艺先进，质量可靠。永捷干冰机科技含量高，操作简便，市场占有率高居全国行业榜首，并长年出口全球多个国家和地区，广受国内外客户和专家赞誉。

公司秉承“科研创新、节能环保”的经营理念，引进国外先进技术，研制开发了永捷干冰清洗设备，成功的将干冰清洗应用于轮胎工业、橡胶压铸、汽车制造、航空航天、机械制造、模具行业、印刷设备、油田化工等领域，打破传统清洗耗时、停产等缺点，实现高效、节能和清洁、环保的在线清洗新模式。

无锡永捷主要产品：干冰机、干冰清洗机、干冰清洗服务、干冰保温箱、舞台烟雾机、闭式冷却塔、蒸发冷等。欢迎全球朋友莅临工厂指导洽谈，共创美好未来。

不只是CO₂的搬运工，**节能减排**——我们在行动！



About us

Established in 2007, Wuxi Yongjie Automatic Equipment Co., Ltd is a professional company which designs, produces and sales dry ice machine, located at the side of beautiful Lake Tai-Hudai town, Binghu District, Wuxi City, adjacent to Yangshan Luqu exit of Xiyi Highway. We have strict management rules and advanced technology, with first class quality product which has passed through ISO9000-2008 quality certificate. Our machine covers top domestic market share based on high technology and simple operation. We have been exporting to many overseas countries and areas and got definite recognition and praise.

With management principle of "Scientific research and innovation, Energy saving and environment protection", we successfully invent dry ice blast cleaning machine by introducing overseas advanced technology. Now the dry ice blast cleaning is widely used in tire, rubber, foundry, automotive, aerospace, machinery, printing, oil and chemical industry etc. It breaks the disadvantage of time-consuming and stop production caused by traditional cleaning method and become a green, efficient and online blast cleaning mode.

Our main products are dry ice machine, dry ice cleaning equipment and its services, dry ice fog machine, dry ice box, evaporative cooling towers, etc. We warmly welcome customers from all the world to our company for cooperation.

Not only CO₂ porter, but also we are taking action for energy saving!



Dry ice block machine 块状干冰机



YGBJ-100-1

YGBJ-100-1单头块状干冰机可以生产200g-1200g的块状干冰，其产量在120kg-185kg/小时，设备性能稳定，运行可靠。生产的块状干冰主要应用于航空配餐、物流冷藏、物流运输降温保鲜等行业。

YGBJ-100-1 single head dry ice block machine can produce 120kg-185kg dry ice from 200g-1200g. This machine has stable function and runs reliably. The dry ice blocks are mainly used on airline food, cold chain transportation, etc.



YGBJ-500-1

YGBJ-500-1单头块状干冰机可以生产2000g--12000g的块状干冰，其产量在360kg--500kg/小时，设备性能稳定，运行可靠。生产的大块状干冰主要应用于长途物流冷藏、物流运输降温保鲜等行业。

YGBJ-500-1 single head dry ice block machine can produce 360kg-500kg dry ice block per hour and each ice block weight is from 2000g-12000g. This machine has stable function and runs reliably. The dry ice blocks are mainly used on airline food, cold chain transportation, etc.

YGBJ-100-2

YGBJ-100-2双头块状干冰机可以生产200g-1200g的块状干冰，其产量在240kg-370kg/小时。它是把2台YGBJ-100-1单头块状干冰机合并在一起，共用一个架子与油箱，其它部件是全部独立分开的，节约了占地面积。生产的块状干冰主要应用于航空配餐、物流冷藏、物流运输降温保鲜等行业。

YGBJ-100-2 Dual-head dry ice block machine can produce 240kg-370kg dry ice block per hour and each ice block weight is from 200g-1200g. This machine is equal to two units of YGBJ-100-1, which share one oil tank and frame, with all other parts separate, therefore saving cover area. The dry ice blocks are mainly used on airline food, cold chain transportation, etc.



YGBJ-500-2

YGBJ-500-2型双头块状干冰机实际上是2台YGBJ-500-1型单头块状干冰机合并在一个架子上，只有架子与油箱共用，其他部分全为独立分开，互相不受影响。

YGBJ-500-2 type double in block ice machine is actually two YGBJ type - 500-1 single head block merging on a shelf with dry ice machine, only the frame and fuel tank Shared, all the other parts to separate, each other is not affected.



技术参数 Technical parameters

序号 Series	型号 Model	电机功率(kw) Motor power	干冰规格(mm) Dry ice size	干冰产量(kg/h) Min Max	干冰密度(t/m³) Raw materials	CO₂转化率 CO₂Transformation rate	进液压力(MPa) liquid inlet pressure	进液内径(mm) liquid inlet diameter	排气管径(mm) Exhaust pipe diameter	油箱容积(L) Fuel tankage	机器外形尺寸(cm) Overall dimension	总重(kg) Weight
1	YGBJ-100-1	7.5	125X105X(10-60)	120 185	≥1.48	40%-43.5%	≤ 2.1	Φ 10	Φ 50	280	143X110X160	1200
2	YGBJ-100-2	2X7.5	125X105X(10-60)	240 370	≥1.48	40%-43.5%	≤ 2.1	2XΦ 10	2XΦ 50	300	150X140X160	1600
3	YGBJ-500-1	11	210X180X(20-210)	300 500	≥1.45	40%-43.5%	≤ 2.1	Φ 20	2XΦ 50	280	250X110X170	2100
4	YGBJ-500-2	2X11	210X180X(20-210)	600 1000	≥1.45	40%-43.5%	≤ 2.1	Φ 20	4XΦ 50	350	250X140X170	2800

可根据客户需求定制不同干冰规格与产量的机型 We could make machine with different product specifications and production for you.

Dry ice pelletizer machine 颗粒干冰机



YGBK-100-1



YGBK-100-1颗粒干冰机可以生产 $\Phi 3\sim\Phi 19\text{mm}$ 的高强度颗粒、柱状干冰，生产能力为100公斤/小时。该干冰制造机生产的干冰主要适用于干冰清洗、低温保鲜与运输、烟雾效果等行业。

YGBK-100-1 granular dry ice machine can produce $\Phi 3\text{mm}$ to $\Phi 19\text{mm}$ of high strength, particle or columnar, with its production capacity is 100 kg/h. The dry ice production of dry ice making machine is mainly suitable for dry ice cleaning, preservation and transportation at low temperature, stage fog, etc.



YGBK-300-1

YGBK-300-1颗粒干冰机可以生产 $\Phi 3\sim\Phi 19\text{mm}$ 的高强度颗粒、柱状干冰，生产能力为270公斤/小时。该干冰制造机生产的干冰主要适用于干冰清洗、低温保鲜与运输、烟雾效果等行业。

YGBK-300-1 granular dry ice machine can produce $\Phi 3\text{mm}$ to $\Phi 19\text{mm}$ of high strength, particle or columnar, with its production capacity is 270 kg/h. The dry ice production of dry ice making machine is mainly suitable for dry ice cleaning, preservation and transportation at low temperature, stage fog, etc.

YGBK-200-1

YGBK-200-1颗粒干冰机可以生产 $\Phi 3\sim\Phi 19\text{mm}$ 的高强度颗粒、柱状干冰，生产能力为180公斤/小时。该干冰制造机生产的干冰主要适用于干冰清洗、低温保鲜与运输、烟雾效果等行业。

YGBK-200-1 granular dry ice machine can produce $\Phi 3\text{mm}$ to $\Phi 19\text{mm}$ of high strength, particle or columnar, with its production capacity is 180 kg/h. The dry ice production of dry ice making machine is mainly suitable for dry ice cleaning, preservation and transportation at low temperature, stage fog, etc.



YGBK-300-2

YGBK-300-2双头颗粒干冰机可以生产 $\Phi 3\sim\Phi 19\text{mm}$ 的高强度颗粒、柱状干冰，生产能力为500公斤/小时。该干冰制造机生产的干冰主要适用于干冰清洗、低温保鲜与运输、烟雾效果等行业。

YGBK-300-2 granular dry ice machine can produce $\Phi 3\text{mm}$ to $\Phi 19\text{mm}$ of high strength, particle or columnar, with its production capacity is 500 kg/h. The dry ice production of dry ice making machine is mainly suitable for dry ice cleaning, preservation and transportation at low temperature, stage fog, etc.



技术参数 Technical parameters

序号 Series	型号 Model	电机功率(kw) Motor power	干冰规格(mm) Dry ice size	干冰产量(kg/h) Min Max	干冰密度(t/m³) Raw materials	CO₂转化率 CO₂Transformation rate	进液压力(MPa) liquid inlet pressure	进液内径(mm) liquid inlet diameter	排气管径(mm) Exhaust pipe diameter	油箱容积(L) Fuel tankage	机器外形尺寸(cm) Overall dimension	总重(kg) Weight
1	YGBK-50-1	3	$\Phi 3\sim\Phi 16$	50 50	≥ 1.48	40%~43.5%	≤ 2.1	$\Phi 8$	$\Phi 50$	100	110X60X120	400
2	YGBK-100-1	5.5	$\Phi 3\sim\Phi 19$	100 100	≥ 1.48	40%~43.5%	≤ 2.1	$\Phi 10$	$\Phi 50$	180	150X80X140	750
3	YGBK-200-1	11	$\Phi 3\sim\Phi 19$	180 200	≥ 1.50	40%~43.5%	≤ 2.1	$\Phi 20$	2X $\Phi 50$	280	175X110X170	1300
4	YGBK-300-1	15	$\Phi 3\sim\Phi 19$	270 300	≥ 1.50	40%~43.5%	≤ 2.1	$\Phi 20$	2X $\Phi 50$	280	215X110X170	1700
5	YGBK-300-2	18.5	$\Phi 3\sim\Phi 19$	460 500	≥ 1.50	40%~43.5%	≤ 2.1	$\Phi 20$	4X $\Phi 50$	350	215X140X170	2200

可根据客户需求定制不同干冰规格与产量的机型 We could make machine with different product specifications and production for you.

干冰清洗机YGQX系列

Dry ice blasting machines

干冰清洗机YGQX的工作原理是利用压缩空气作为动力,把极低温-78℃的高密度干冰颗粒加速到接近音速的速度撞击被清洗的表面污垢,使表面污垢突然降温导致表面脆化及爆裂,同时干冰粒钻进污垢的裂缝后,随即迅速升华为气体,其体积瞬间膨胀近800倍,从而把污垢剥离物件表面。

Cleaning with dry ice! This new development is quickly expanding around the world. One system uses small rice size pellets of dry ice shooting them out of a jet nozzle with compressed air. It works somewhat like sandblasting or high-pressure water or steam blasting, with superior results. The frigid temperature of the dry ice is -78℃.

独特性能 Unique features

- 整机采用SUS304材料更加亮丽与耐用;
- 通过变频调速更轻易可靠的控制耗冰量;
- 多种型号喷枪选择适应不同的清洗场合;
- 可调速气动振动器使供冰更加均匀顺畅;
- 直径260mm的大轮子更增添机器的平稳。

- ◆SUS304 materials construction appears beautiful and reliable use;
- ◆Control ice consumption stably by frequency conversion adjusting speed;
- ◆Various spray guns applicable for different cleaning areas;
- ◆Pneumatic vibrator makes ice supply evenly and smoothly;
- ◆260mm wheels increases machine stability.



技术参数 Technical parameters

序号 Series	型号 Model	电机功率(kw) Motor power	电压 (VAC) Voltage	供气压力 (MPa) Air supply pressure range	耗气量 (m³/min) Air consumption	干冰规格 (mm) Dry ice size	耗冰量 (kg/min) With ice	干冰斗 容量(L) Ice hopper capacity	进气管 长度(m) Air hose length	接口 螺纹(M) Connector screw thread	出水管 长度(m) Ice blast hose length	外形尺寸(cm) Overall dimension	净重kg Weight
1	YGQX-550-J	0.55	220	0.4-1.2	3	Φ1.5-Φ4	0.1-2.0	20	9	3/4"	6	50X40X100	80
2	YGQX-750-W	0.75	220	0.4-1.2	4	Φ1.5-Φ4	0.1-3.0	28	9	1"	6	58X46X110	160
3	YGQX-750-1	0.75	220	0.4-1.2	4	Φ1.5-Φ4	0.1-4.0	28	9	1"	6	58X46X110	150

干冰清洗机配件 Accessories

进气管Air hose

进气管使用耐压在8.0MPa的橡胶管,连接干燥洁净的压缩空气源和清洗机,两头均采用可旋转的活接头。

Air hose is rubber hose with pressure at 8.0MPa, connecting between dry clean compressed air and dry ice blaster machine; there are rotating joints at two ends.



型号 Model	适用机型 Dry ice blaster	接口螺纹 Connector screw thread	长度 Length
YGQX-JGZ001	YGQX-550	3/4"	9m
YGQX-JGZ002	YGQX-750	1"	9m

出水管Ice blast hose

出水管采用进口的专用耐低温橡胶管道,并在外部加了一层牛津布保护套。

Ice blast hose is imported special low temperature rubber hose, covered a layer of oxford cloth protective casing.

型号 Model	适用机型 Dry ice blaster	接口螺纹 Connector screw thread	长度 Length
YGQX-JGZ001	YGQX-550	3/4"	6m
YGQX-JGZ002	YGQX-750	1"	6m

常用喷枪Applicator



YGQX-PZB001	YGQX-PZB002	YGQX-PZB003	YGQX-PZB004	YGQX-PZB005
普通扁嘴, 全长330mm, 出口长38mm, 宽4mm. 适用于大多数工况。	普通宽扁嘴, 全长33mm, 出口长70mm, 宽3.5mm. 适用于大面积清洗的场所。	加长普通扁嘴, 全长50mm, 出口长38mm, 宽4mm. 适用于需要特殊清洗的场所。	普通圆嘴, 全长38mm, 出口Φ20mm. 适用于需要特殊清洗的场所。	高喷射力圆嘴, 全长38mm, 出口Φ12mm. 适用于需要污垢难于清除的特殊场所。
Common flat nozzle, 33mm long and mouth: L38mm, W4mm, suitable for most cleaning cases.	Common wide flat nozzle, 33mm long and mouth: L70mm, W3.5mm, suitable for large area cleaning.	Enhanced-length common flat nozzle, 50mm long and mouth: L38mm, W4mm, suitable for special cleaning cases.	Common round nozzle, 38mm long and mouth: Dia.20mm, suitable for special cleaning cases.	Round nozzle with high injection force, 38mm long and mouth: Dia.12mm, suitable for special cleaning cases where dirt is hard to remove.

可根据客户特殊需求定制各种类型喷枪。Can be customized according to customer special types of applicator.

干冰清洗优点

1. 干冰的低温使污垢的粘附能力降低、脆性增大。
2. 微爆炸，干冰粒钻进污垢裂缝后，在几分之一秒内气化，其体积瞬间膨胀600~800倍，将污垢剥离物件表面。
3. 由于干冰升华为气体，清洗过程没有产生任何二次废物。
4. 无需把被清洗物拆卸下来，可以实现在线清洗。
5. 是一种非破坏性除污，不伤机器，不损模具。
6. 不能用水清洗的地方完全可用干冰清洗替代。



Dry ice blasting:

is a non-abrasive, nonflammable and nonconductive cleaning method is environmentally-friendly and contains no secondary contaminants such as solvents or grit media is clean and approved for use in the food industry allows most items to be cleaned in place without time-consuming disassembly can be used without damaging active electrical or mechanical parts or creating fire hazards can be used to remove production residues, release agents, contaminants, paints, oils and biofilms can be as gentle as dusting smoke damage from books or as aggressive as removing weld slag from tooling can be used for many general cleaning applications

干冰清洗应用行业

1. 模具：轮胎模具、聚氨酯模具、橡胶模具、合金压铸模具等；生产线上除污，快速省时。
2. 食品业：饼干烤炉、输送带、鸡蛋饼模等；低温干式除污，免除细菌滋生机会。
3. 电子电机：线路板、影印机、马达、发电机等；干式除污，不会引起短路、漏电。
4. 船舶：船壳、入水阀、冷凝器清理；比一般用高压水射流清洗更干净。



5. 汽车：干式清洗门皮、蓬顶、车厢无水渍，清除引擎、车底油污不会引致水污染。
6. 飞机工业：喷射引擎及波箱、起落架的除油污，可直接在机体工作，节省时间。
7. 发电厂：清理涡轮机叶时，不需拆下桨叶，省去重新调校桨叶的动能平衡。
8. 火灾后清理火场：有毒废物、烧焦味等清除效果显著，不会增加污染物的数量。
9. 还有其他行业如印刷业、石油化工、核电业等。

Dry ice blasting application

Electrical

Electronic/electrical control panels	Cable trays	Motors/Stators	Armatures/Coils/Windings	Insulators
Generators	Printed Circuit Boards	Semi-Conductors	Robotic Equipment	Sub-Stations
Transformers	Switch Gear			
Relays	Turbines			

Food

Ovens	Floors	Walls	Processing Equipment	Equipment Ceilings	Conveyors
Bake-Off trays		Packaging Areas and Equipment			

Industrial

Molding Equipment	Piping	Printing Presses	Aircraft
Butt Welders	Tanks	Pulp/Paper Equipment	Boiler Tubes
Process Equipment	Ship Hulls	Oil Field Equipment	Automobiles Interiors
Manufacturing Equipment			

Commercial

Buildings	Hotels	Heating/Cooling Systems	Graffiti Decal Removal
Exterior/Interior	Residential	Bricks Wood	Remediation/Restoration
Hospitals Nursing Homes	Structures		

Other

Cigarette/Cigar Smoke	Waste Containers	Beauty Salons	Fire Restoration
Formaldehyde	Nuclear Decontamination		

干冰保温箱系列

Dry ice heat preservation box



YGBW-50

外形Outer Size: 47cm × 42cm × 92cm
内净Inner Size: 31cm × 26cm × 70cm
容积Capacity: 50L 总重Weight: 20kg
保温效果Heat loss: 损耗3~5%/24her

YGBW-50干冰保温箱采用先进的技术、耐低温、长寿命的高级树脂材料，在模具中一次成型。可存放50公斤块状干冰，40公斤颗粒干冰，底下装有四个容易更换的重型滑轮可自由滑动，两侧有扣手可把箱子抬着。

The YGBW-50 is made of high grade resin materials which is low temperature resistant and has long service life. One stepmolding technology is adopted to make sure its completeness and reliability.

It can store 40kg dry ice pellets or 50kg dry ice slices/blocks. Four wheels on the foot makes easy to move and two handles at sides make easy to carry.

YGBW-250

外形Outer Size: 110cm × 85cm × 104cm
内净Inner Size: 90cm × 65cm × 67cm
容积Capacity: 370L 总重Weight: 80kg
保温效果Heat loss: 损耗5~8%/24her

YGBW-250干冰保温箱采用先进的技术、耐低温、长寿命的高级树脂材料，在模具中一次成型。可存放400公斤以上块状干冰，250公斤以上颗粒干冰，底下装有四个容易更换的重型滑轮可自由滑动。



The YGBW-250 is made of high grade resin materials which is low temperature resistant and has long service life. One stepmolding technology is adopted to make sure its completeness and reliability.

It can store 400kg dry ice pellets or 250kg dry ice slices/blocks. Four wheels on the foot makes easy to move.

YGBW-230

外形Outer Size: 115cm × 75cm × 103cm
内净Inner Size: 95cm × 55cm × 63cm
容积Capacity: 310L 总重Weight: 70kg
保温效果Heat loss: 损耗4~7%/24her

YGBW-230干冰保温箱采用进口的耐低温工程塑料制作，大大提高了保温性能、耐磨性、抗撞击性。可存放350公斤以上的块状干冰或者230公斤以上的颗粒干冰，可选择固定底角脚和重型滚轮。



YGBW-230 Dry ice cooler box of imported low temperature engineering plastics production, greatly improving the thermal insulation properties, wear resistance, impact resistance. Can be stored for more than 350 kg block of dry ice or 230 kg particles of dry ice, choose a fixed corner feet and heavy rollers.

干冰烟雾机 YGYW-4000

Dry ice fog machine

型号model: YGYW-4000
外形尺寸Outer Size: 62 × 40 × 67cm
重量Weight: 22kg
功率power: 2kw + 2kw
电压Voltage: AC220V
水箱容积Water Capacity: 55L
加水Add Water: 25L-40L

YGYW-4000 干冰烟雾机适用于各类剧场、剧团、婚宴的演出。全不锈钢内外壳、设计美观独特。具有防干烧、自动温控、输入功率自由选择等功能。无噪音、结构紧凑美观、使用方便、喷雾距离远、是舞台干冰机的新产品。



YGYW-4000 Dry ice fog machine is widely used in shows at theatre, troupe, and wedding party etc. Stainless steel shell and beautiful design. This unit has anti-dry, auto-temperature control and free choice on power input function.

It has very low noise, and compact structure with nice appearance, convenient to use and far spray. It is brand new for stage use.

YBF 闭式复合流冷却塔 YBF CLOSED MIXED-FLOW COOLING TOWER

YBF设计和结构特点 YBF DESIGN AND STRUCTURAL FEATURES


YBF系列闭式冷却塔采用复合流式冷却方式，高效的脱水器，漂水率极低。冷却介质封闭循环，没有杂质进入，保证了介质的纯净。水循环的水使用软水，不结垢，不堵塞管路。占地面积小，可以根据需要移动、摆放，维护成本低。



技术参数表 Technical parameter table

型号	冷却水量 m^3/h	主机进出管径 mm	喷淋泵		风机		外形尺寸			主机自重 kg	运转自重 kg
			功率 kw	水量 m^3/h	功率 kw	风量 m^3/h	L mm	W mm	H mm		
YBF-8S	8	DN50	0.37	12	0.55	12000	1600	1450	2800	620	1070
YBF-10S	10	DN65	0.37	12	0.55 × 2	15000	1900	1700	2600	740	1850
YBF-15S	15	DN65	0.37	14	0.75 × 2	22000	1900	1700	2800	810	1930
YBF-20S	20	DN80	0.55	16	0.75 × 2	28000	2100	2000	2800	910	2450
YBF-30S	30	DN80	0.75	28	1.5 × 2	40000	2100	2000	2950	1020	2150
YBF-40S	40	DN100	1.1	45	1.5 × 2	54000	2600	2000	3030	1300	2810
YBF-50S	50	DN100	1.1	50	1.5 × 2	68000	2600	2200	3290	1480	3150
YBF-65S	65	DN100	1.5	55	2.2 × 2	86000	2750	2500	3300	1720	3930
YBF-80S	80	DN125	2.2	90	3.0 × 2	105000	3400	2500	3400	2380	5280
YBF-100S	100	DN125	3.0	105	2.2 × 3	130000	4200	2950	3500	2900	7100
YBF-125S	125	DN150	3.0	110	4.0 × 2	165000	4600	2900	3510	3390	7730
YBF-150S	150	DN150	4.0	150	3.0 × 3	200000	5100	3400	4240	3980	9750
YBF-175S	175	DN125 × 2	4.0	160	5.5 × 3	230000	4900	3200	4930	5420	10950
YBF-200S	200	Dn250	5.5	200	5.5 × 3	240000	5600	3500	4500	5500	13000

注：(1) 设计工况：进水温度 $\approx 37^{\circ}\text{C}$ ，出水温度 $\approx 32^{\circ}\text{C}$ ，湿球温度 $\approx 28^{\circ}\text{C}$ ，大气压力 $\approx 9.94 \times 104\text{Pa}$ ；
(2) 样本图片与技术参数仅供参考，详细参数请来电咨询。可根据客户需求定做非标产品。

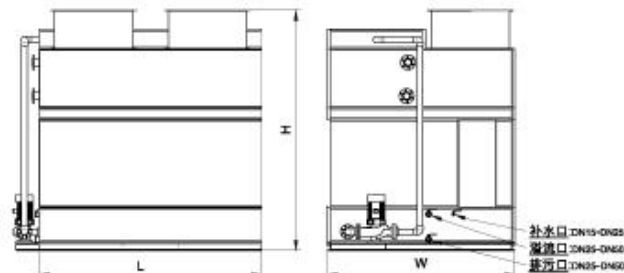


YEC 蒸发冷凝器系列 YEC EVAPORATIVE CONDENSER SERIES

工作原理 PROCESS PRINCIPLE

蒸发式冷凝器是制冷、空调系统中的主要热交换设备，其工作原理是：制冷、空调系统中压缩机排出的制冷剂高压过热气态经过蒸发式冷凝器中冷凝排管，使高压高温气态的制冷剂与排管外的喷淋水和空气进行热交换，即气态制冷剂由上部进气口进入冷凝排管后自上而下逐渐被冷凝成为液态制冷剂。




产品组成 PRODUCT FORMATION

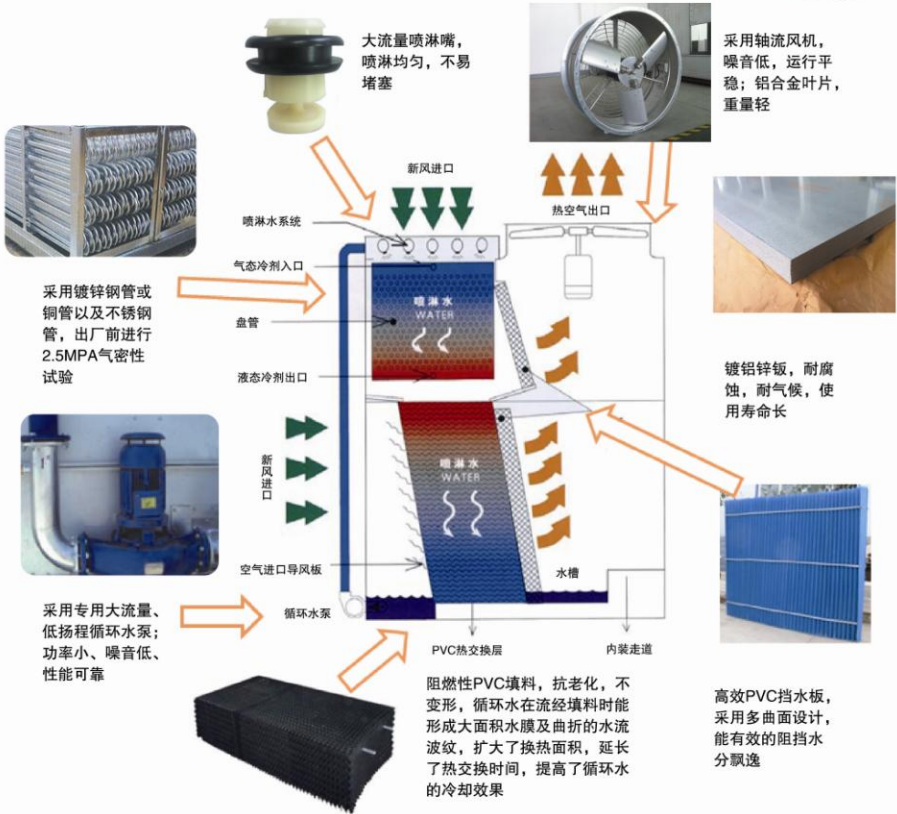

技术参数表 Technical parameter table

型 号	名义 工况 排热量	轴流风机			外形尺寸				接管尺寸					循环水泵			重量
		台数	单台 功率	单台 风量	mm				mm					流量	功率	运输	运行
	kw	台	kw	m³/h	A	B	H	J	补水	排污	溢流	进气	出液	m³/h	kw	kg	kg
YEC-430	430	1	4	65000	1820	2250	4285	340	DN25	DN50	DN50	φ 76	φ 57	50	1.1	3370	4300
YEC-475	475	1	4	65000	1920	2250	4285	340	DN25	DN50	DN50	φ 76	φ 57	56	2.2	3580	4500
YEC-495	495	1	5.5	71000	1920	2250	4285	340	DN25	DN50	DN50	φ 76	φ 57	56	2.2	3650	4600
YEC-550	550	1	4	63500	1920	3000	4285	340	DN25	DN50	DN50	φ 89	φ 76	100	2.2	4060	5100
YEC-595	595	1	5.5	78000	1920	3000	4285	340	DN25	DN50	DN50	φ 89	φ 76	100	2.2	4150	5200
YEC-670	670	1	5.5	78000	1920	3000	4285	340	DN25	DN50	DN50	φ 89	φ 76	100	2.2	4430	5500
YEC-700	700	1	5.5	78000	1920	3000	4285	340	DN25	DN50	DN50	φ 89	φ 76	100	2.2	4880	6200
YEC-735	735	1	7.5	87000	1920	3000	4285	340	DN25	DN50	DN50	φ 108	φ 89	100	2.2	4950	6300
YEC-900	900	2	5.5	71000	3570	2250	4285	340	DN25	DN50	DN50	φ 108	φ 89	100	2.2	5780	7500
YEC-960	960	2	5.5	71000	3570	2250	4285	340	DN25	DN50	DN50	φ 108	φ 89	112	4	6020	7800
YEC-1050	1050	2	5.5	71000	3570	2250	4285	340	DN25	DN50	DN50	φ 108	φ 89	112	4	6260	8100
YEC-1165	1165	2	4	65000	3690	2700	4285	340	DN25	DN50	DN50	φ 108x2	φ 108	130	5.5	6830	9500
YEC-1285	1285	2	5.5	78000	3690	2700	4285	340	DN25	DN50	DN50	φ 108x2	φ 108	130	5.5	6970	9700
YEC-1335	1335	2	7.5	87000	3690	2700	4285	340	DN25	DN50	DN50	φ 108x2	φ 108	130	5.5	7100	9800
YEC-1420	1420	2	5.5	78000	3760	3000	4285	340	DN25	DN50	DN50	φ 108x2	φ 108	130	5.5	7520	10200
YEC-1490	1490	2	7.5	87000	3760	3000	4285	340	DN25	DN50	DN50	φ 108x2	φ 108	130	5.5	7680	10300
YEC-1575	1575	3	4	65000	5600	2250	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	7920	10500
YEC-1620	1620	3	5.5	71000	5600	2250	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	8150	10600
YEC-1690	1690	3	7.5	79000	5600	2250	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	8280	10700
YEC-1765	1765	3	7.5	79000	5600	2620	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	9020	12600
YEC-1935	1935	3	5.5	71000	5600	2620	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	9850	12900
YEC-2010	2010	3	7.5	87000	5600	3000	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	10100	13100
YEC-2140	2140	3	5.5	78000	5600	3000	4100	340	DN25	DN50	DN50	φ 108x2	φ 89x2	182	7.5	10600	13500
YEC-2245	2245	3	7.5	87000	5600	3000	4100	340	Dn25	Dn50	Dn50	φ 108x2	φ 89x2	182	7.5	10800	13900

备注:
1、表中数据仅供参考;
2、表中的运行重量为设备净重加制冷剂重量及底部水盘贮水的重量;
3、表中的名义工况排热量是指冷凝温度 Tk=35℃, 空气进口湿球温度 Ts=24℃的数据;
4、如需配置水电子除垢仪, 请用户在订货时说明。

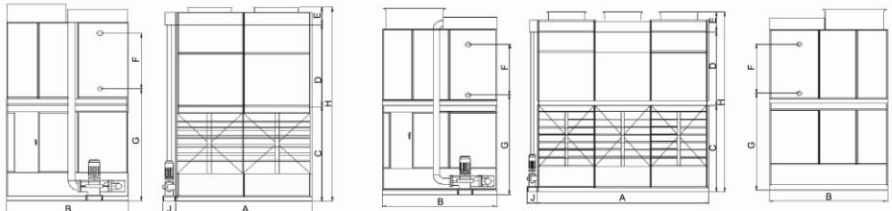

部分用户名录 Customer List



林德二氧化碳—上海
林德二氧化碳—北京
林德二氧化碳—马来西亚
林德二氧化碳—泰国
惠州凯美特气体
广州华达石化
广东中成化工
深圳深特气体
深圳文川气体
深圳创蓝天气
江门金风天气
福州中铭气体
晋江东埭制氧
元祖食品—中国

北京天竺干冰
北京亚南气体
北京千禾干冰
北京天鸿玺
北京三千贯
北京戴德干冰
北京合胜邦达
天津联博化工
天津东祥气体
武汉百特干冰
南昌江竹气体
南昌康平干冰
萧山东南气体
浙江中嘉华辰

上海岩谷气体
上海振新气体
上海毅智气体
上海科举化工
上海药明康德
苏州金宏气体
张家港现代威亚
无锡远通气体
常州吉龙干冰
泰兴神力干冰
姜堰昆仑气体
南京金汇干冰
合肥徽达气体
合肥恒兴气体

青岛利华清洗
青岛富民来气体
东营顺新化工
广饶天星石化
河南天冠集团
南阳中天气体
河南斯诺实业
兰州裕隆气体
成都五星加福
成都晨源气体
成都航空四站

香港工業氣體有限公司
Azerbaycan Respublikassında Numayendelik
Kaboudan Gas Company
Eastern Oxygen Industries Sdn Bhd

Praxair Technology, Inc—South Americ
Intime Fire Appliances Pvt. Ltd
Linde(Thailand) Public Company Limited
Liquid Carbonic Del Paraguay SA

